


**SM567690 | SM567692 | SM567694 | SM567695 | SM567697 | SM567699**

- Size options: 5," 6.5," 7," and 9"
- Available in 3000k (Made-to-order Color Temperatures available)
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Available in Black (BK), Satin Nickel (SN) and White (WT)
- Dimmable with Triac and ELV Dimmers
- Pendant light accessory available (sold separately)
- Easy to install: fits in 3-0 and 4-0 Outlet Box (pancake and mud ring acceptable)
- Edge-Lit LED Technology
- Suitable for Wet Location, for use on ceilings outdoor and above showers



Round

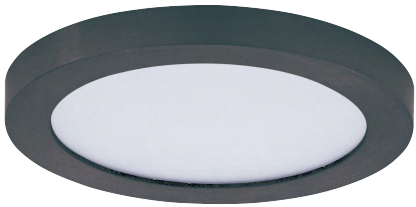



Square



**57600**  
**PENDANT ACCESSORY**  
(Sold Separately,  
Fixture NOT included)

**PRODUCT DESCRIPTION**

This low profile flush mount is our entry level Wafer. Manufactured of a plastic shell with aluminum backing, the Chip brings all the look of the Wafer at economical pricing for residential applications. The bright and even lighting effect is delivered by edge-lit technology offering an upscale surface mount solution to substitute recessed can lighting. Use the optional pendant adapter to convert any size to a hanging fixture.



**MEASUREMENTS**

MODEL	DIMENSION	BULB TYPE	CRI	COL TEMP.	LUMENS DEL	DIMMABLE	INPUT
SM567690 RD	5.25"W x 0.75"H x 5.25"L	12W PCB Integrated LED	90+	3000K	750	Triac CL/ELV	120V
SM567692 RD	7"W x 0.75"H x 7"L	16W PCB Integrated LED	90+	3000K	1100	Triac CL/ELV	120V
SM567694 RD	9" W x 0.75" H x 9"L	18W PCB Integrated LED	90+	3000K	1250	Triac CL/ELV	120V
SM567695 SQ	5"W x 0.75"H x 5"L	12W PCB Integrated LED	90+	3000K	900	Triac CL/ELV	120V
SM567697 SQ	6.4"W x 0.75"H x 6.4"L	15W PCB Integrated LED	90+	3000K	1050	Triac CL/ELV	120V
SM567699 SQ	8.5" W x 0.75" H x 8.5"L	18W PCB Integrated LED	90+	3000K	1250	Triac CL/ELV	120V

**LAMPING**

**FINISHES OPTIONS:**

- Satin Nickel (SN)
- White (WT)
- Black (BK)

**MATERIAL:**

Polycarbonate + Steel

**GLASS:**

White

**AVAILABLE SIZE:**

5" | 6.5" | 7" | 9"

**RATINGS:**

- cETLus
- Wet Location
- Title 24 JA8 Compliant
- Energy Star
- ADA



**ADDITIONAL:**

INSTALL UP/DOWN: UP  
RATED LIFE: 50,000 hours  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)  
WIRE LENGTH 8"L

*Always consult a qualified electrician before installing any lighting product*



**Modifications or Customizations:** Please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)  
**Sample Request:** Please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line "Sample Order\_ [Project Name] / [Specifier/Designer]"  
All samples are subject to Studio M approval and must show proof of project and/or explanation.

Job Name:	Job Type:
Quantity:	Comments: