

# CORONA | FANDELIER

## SM660002SN

- ETL/cETL
- Title 20 listed
- LED 3000K
- Suitable for Dry location
- Wall mountable (remote control included)

Job Name:	Job Type:
Quantity:	Comments:



### PRODUCT DESCRIPTION

The Corona Fandelier features a cage of artfully bent Satin Nickel that houses the three innovatively curved fan blades. Its streamlined styling is paired with a high-powered LED ring offering additional downlight while circulation the air.

- Always consult a qualified electrician before installing any lighting product
- Installation Requirements:  
Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding at least 35 lbs

### MEASUREMENTS


DIMENSIONS : 27.25"D x 19.5"H  
CANOPY : 7"D x 2.75"H  
HANGING WEIGHT : 15.86 lb  
BLADE : 3 Blades with 22" span  
BLADE PITCH : Varying  
BLADE TO CEILING : 11"H

### LAMPING

INPUT VOLTAGE : 120V  
LUMENS : 3895 Rated (2000 Del.)  
BULB : 46W PCB LED (Integrated)  
DIMMABLE : Yes  
CRI : 80+  
COLOR TEMP : 3000K  
MOTOR TYPE : DC Motor

### AIRFLOW

SPEEDS : 6  
AIRFLOW CFM : 5057  
ELECTRICITY USE : 31.90W  
AIRFLOW EFFICIENCY: 158.5

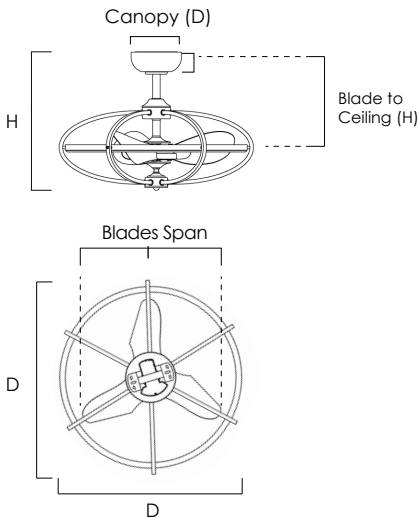

### FINISHES OPTIONS:

Satin Nickel (SN)



### MATERIAL:

Steel  
Polypropelene Fan Blades  
Aluminum

### INCLUDES

- Wall Mountable Remote Control
- 1 x 6" Downrod

### DOWNROD OPTIONS

- 18" (FRD0118SN)
- 24" (FRD0124SN)
- 30" (FRD0130SN)
- 36" (FRD0136SN)

### RATINGS:

ETL cETL  
Dry Location  
Title 20



### ADDITIONAL:

RATED LIFE: 35,000 Hours  
OPERATING TEMP: -20° C (-4°), 40°C (104°F)  
LIGHTING DIRECTION: Down

# STUDIO•M

For Modifications or Customizations, please email [contract@studiomlighting.com](mailto:contract@studiomlighting.com)

For Sample Request, please email [order@studiomlighting.com](mailto:order@studiomlighting.com) with subject line: "Sample Order\_[Project Name]/[Specifier/Designer]"

All Samples are subject to Studio M approval and must show proof of project and/or explanation.

StudioMlighting.com - 626.956.4209