


STUDIO•M

PRODUCT NAME: LARIAT LED PENDANT

ITEM NUMBER: SM23845BZGTGL

Please consult your electrician for hanging fixture and wiring.

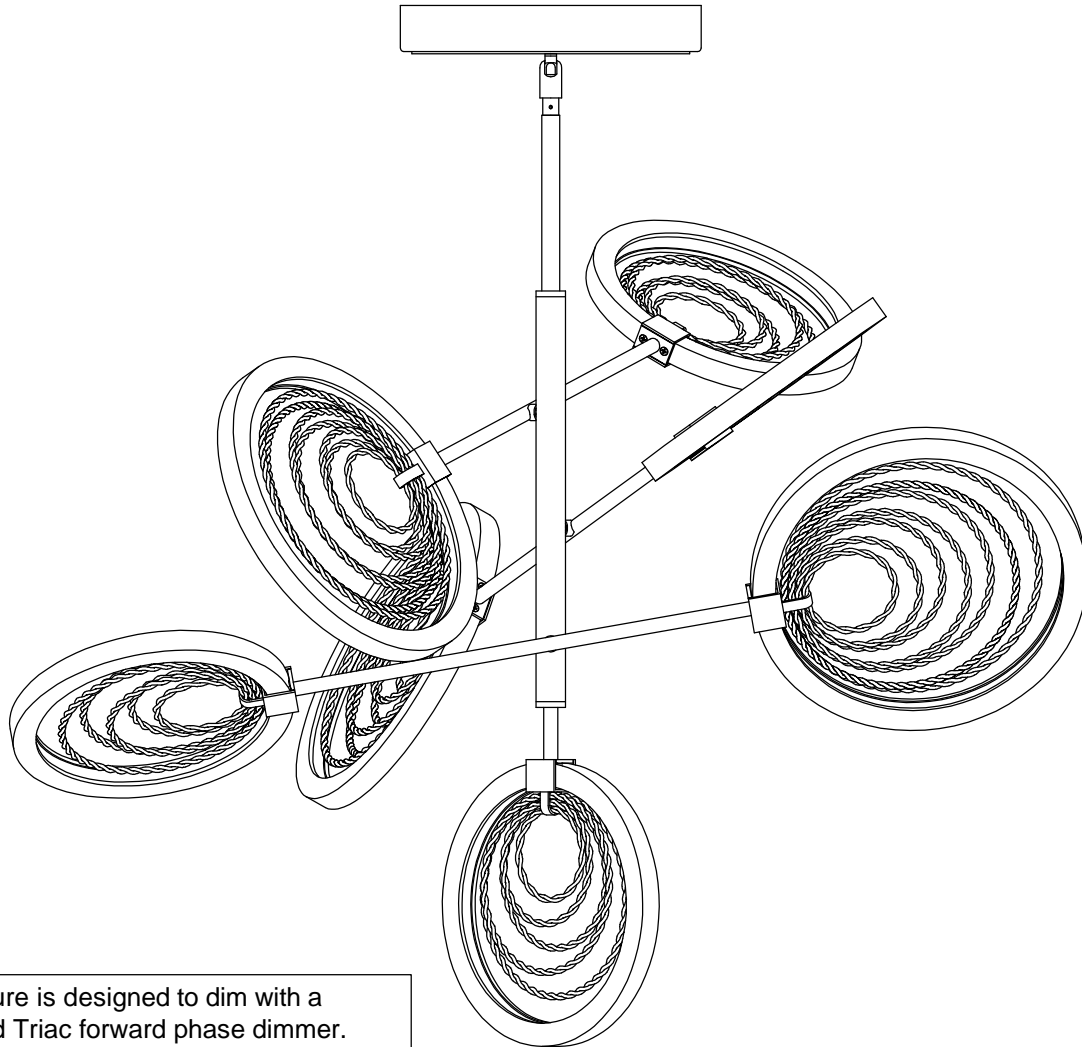


The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer. Below is a list of recommended dimmers:
Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.



Warning! Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulbs (integrated): LED 114W


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.

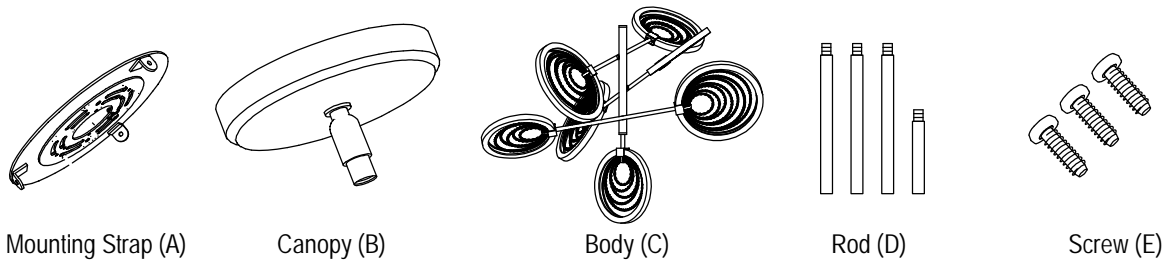


Locate all hardware & components before discarding packaging

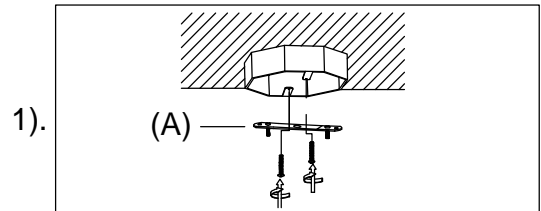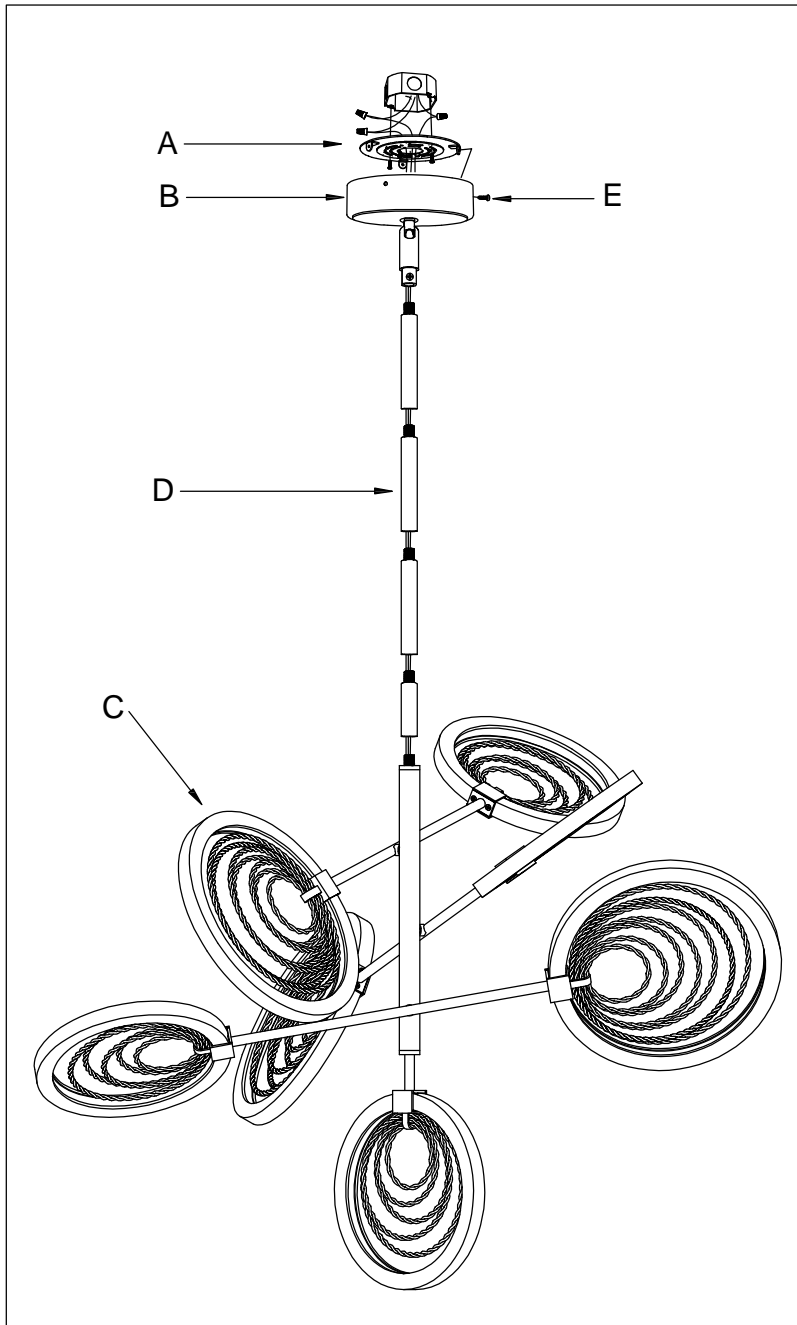


1). **Step.1:** Remove Mounting Strap (A) from fixture and install to electrical box.

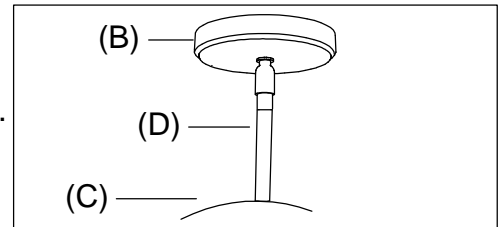

2). **Step.2:** Determine correct length of rod needed for hanging height. Screw the Rod (D) on the Body (C) and screw the Canopy (B) on the rod.

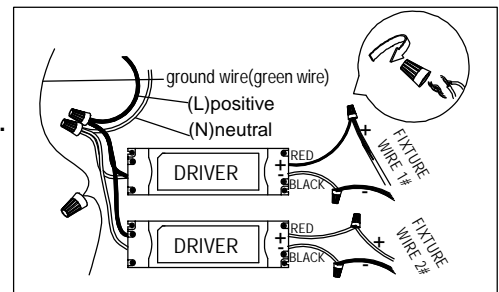

3). **Step.3:** Wire fixtures to red wires of the driver, wire black and white wire of the driver to wires in outlet box. Copper wire is for ground.

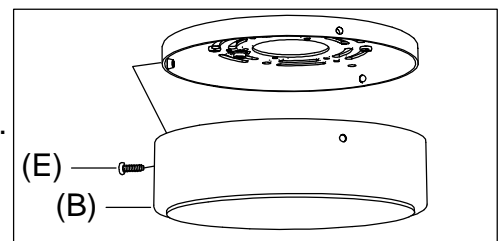

4). **Step.4:** Install body (C) to Mounting Strap (A) and tighten Screw (E) through the hole of canopy (B) on the Mounting Strap (A).

Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.