


# STUDIO•M

PRODUCT NAME: PORTAL LED PENDANT


ITEM NUMBER: SM23850BCGS

Please consult your electrician for hanging fixture and wiring.


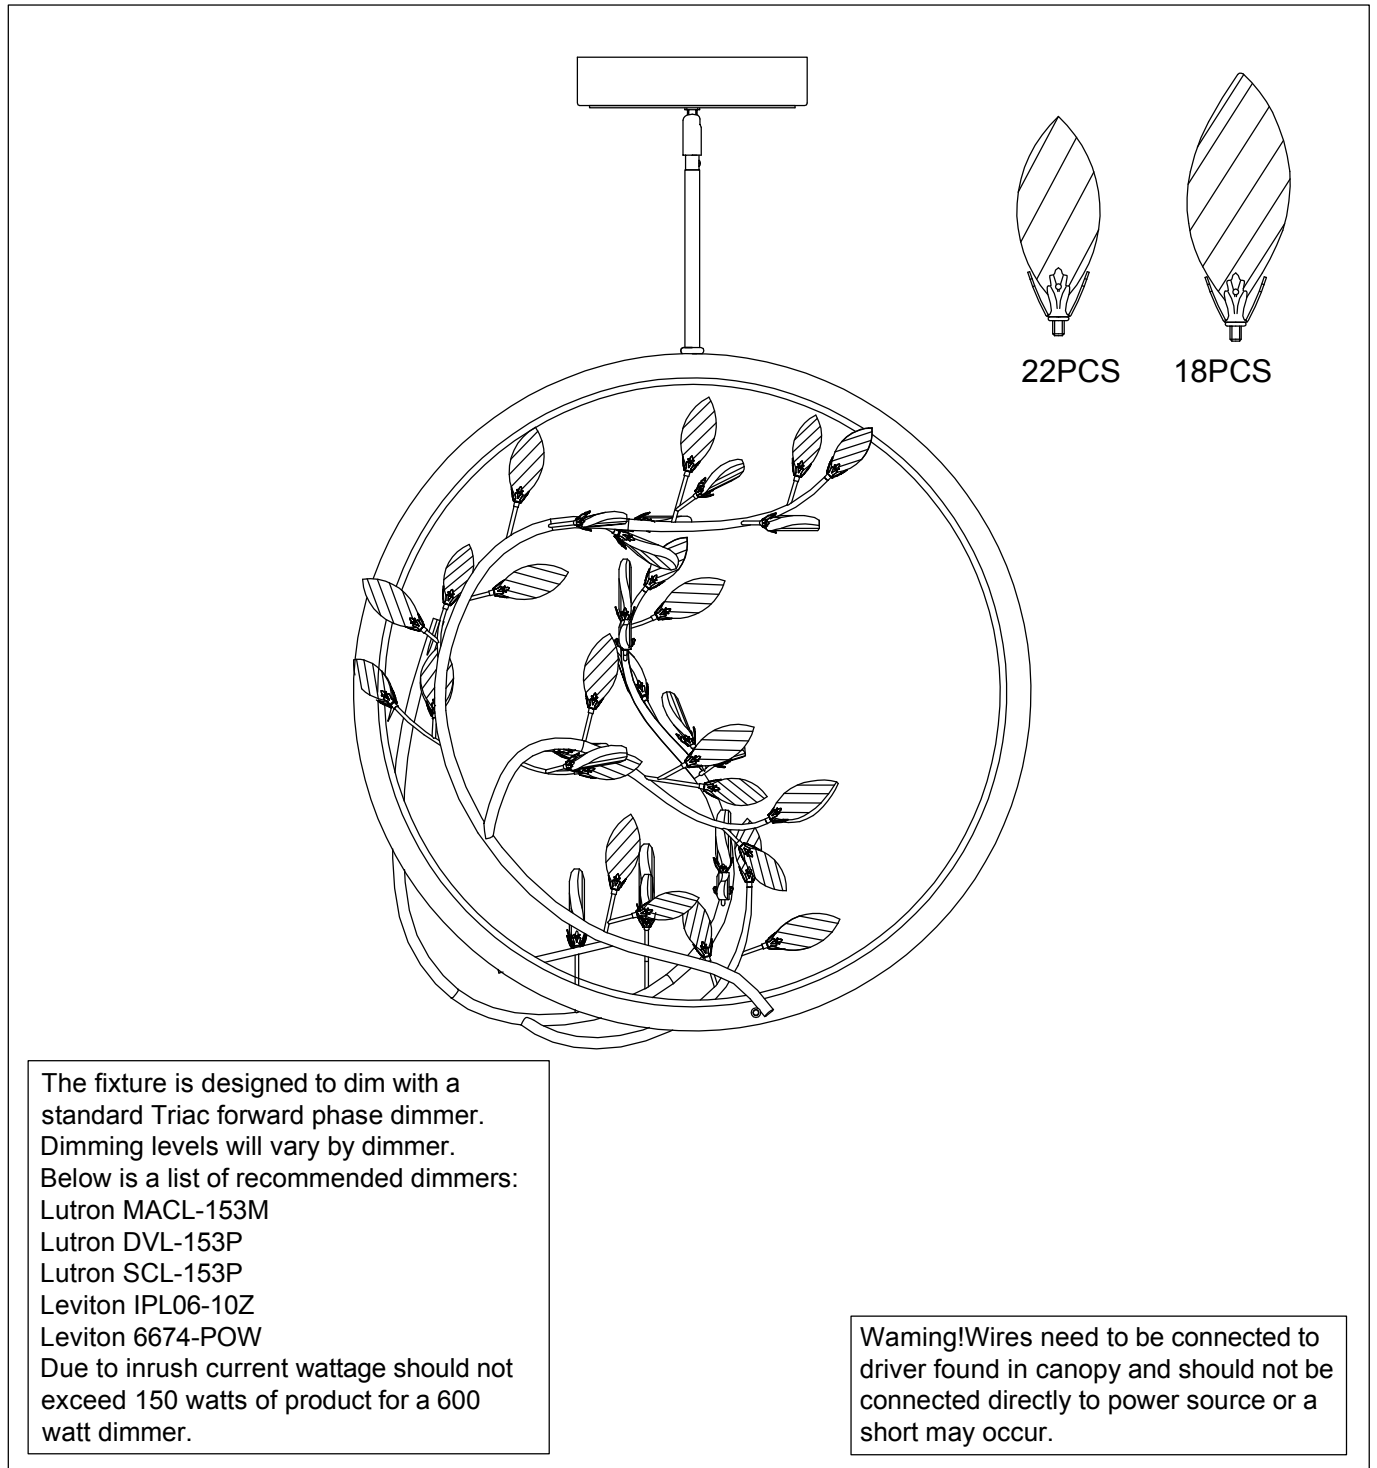


**Bulbs (integrated): LED 13W**

**IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.**

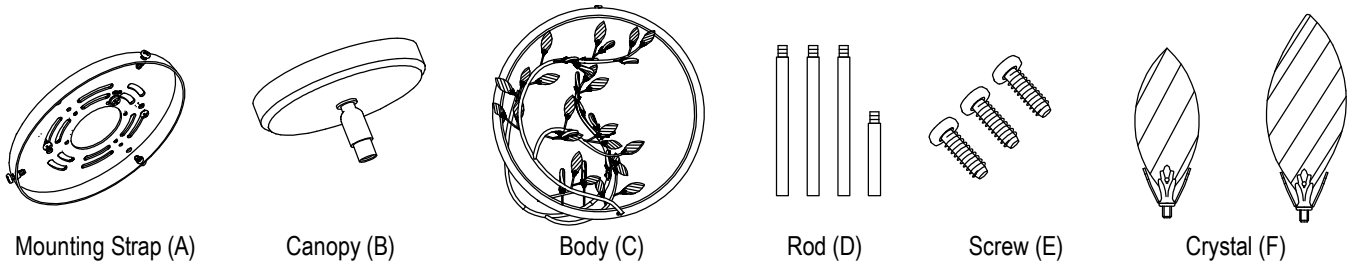


**Locate all hardware & components before discarding packaging**

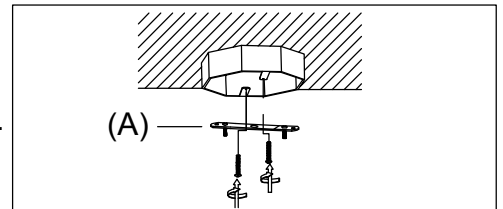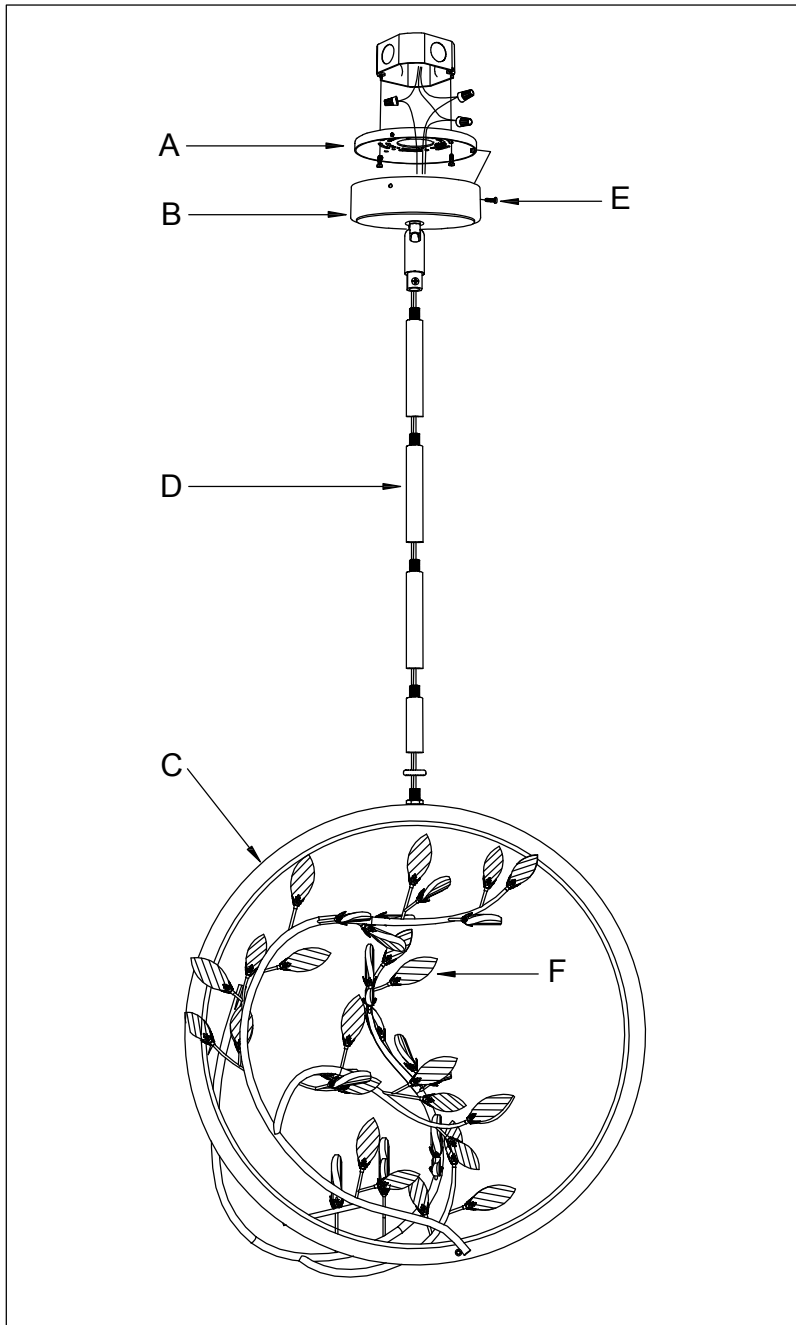


1.

Step.1: Remove Mounting Strap (A) from fixture and install to electrical box.

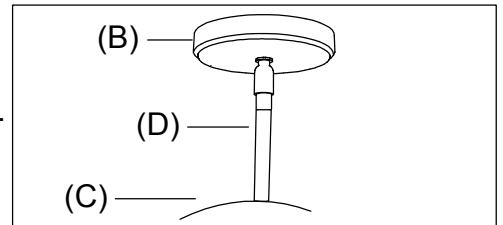


2.

Step.2: Determine correct length of rod needed for hanging height. Screw the Rod (D) on the Body (C) and screw the Canopy (B) on the rod.

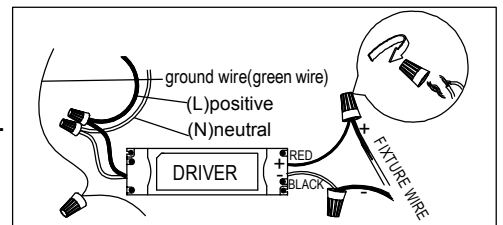

3.

Step.3: Wire fixtures to red wires of the driver, wire black and white wire of the driver to wires in outlet box. Copper wire is for ground.

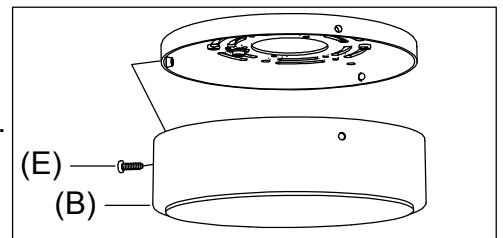

4.

Step.4: Install body (C) to Mounting Strap (A) and tighten Screw (E) through the hole of canopy (B) on the Mounting Strap (A). Install crystal (F) to the arm.

**Cleaning & Care:**

Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.